



SXTECH

Technical Instructions	Printers	OEM Info	Tools	1
------------------------	----------	----------	-------	---

**CORPORATE
LOS ANGELES, USA**
US 1 800 394.9900
Int'l +1 818 837.8100
FAX 1 800 394.9910
Int'l +1 818 838.7047

ATLANTA, USA
US 1 877 676.4223
Int'l +1 770 516.9488
FAX 1 877 337.7976
Int'l +1 770 516.7794

DALLAS, USA
US 1 877 499.4989
Int'l +1 972 840.4989
FAX 1 877 774.1750
Int'l +1 972 840.1750

MIAMI, USA
US 1 800 595.429
Int'l +1 305 594.3396
FAX 1 800 522.8640
Int'l +1 305 594.3309

NEW YORK, USA
US 1 800 431.7884
Int'l +1 631 345.0121
FAX 1 800 431.8812
Int'l +1 631 345.0690

SANFORD, USA
US 1 800 786.9049
Int'l +1 919 775.4584
FAX 1 800 786.9049
Int'l +1 919 775.4584

TORONTO, CAN
CAN 1 877 848.0818
Int'l +1 905 712.9501
FAX 1 877 772.6773
Int'l +1 905 712.9502

BUENOS AIRES, ARG
ARG 0810 444.2656
Int'l +011 4583.5900
FAX +011 4584.3100

MELBOURNE, AUS
AUS 1 800 003. 100
Int'l +62 03 9561.8102
FAX 1 800 004.302
Int'l +62 03 9561-7751

SYDNEY, AUS
AUS 1 800 003.100
Int'l +62 02 9648.2630
FAX 1800 004.302
Int'l +62 02 9548.2635


MONTEVIDEO, URY
URY 02 902.7206
Int'l +5982 900.8358
FAX +5982 908.3816

JOHANNESBURG, S.A.
S.A. +27 11 974.6155
FAX +27 11 974.3593

ACOM Comp. LX3808/3808D/4803
Apple Laserwriter IIF/IIG/IIITX/IIISC
Brother HL8/8D/8E/8PS/8V/10DPS/
10DV/10H/10PS/10V
Canon Fax L920/L3100/L4600
Canon LBP8/8SX/8II/8IIR/8IIT/8III+/
8IIIR/8IIIT/200V/RX/SX
HP Laserjet II/IIID/III/III-Mac/IIID
Imagen Image Station 2308S/2308S-
Turbo/3308S/3308S-Trbo.
Lasermaster 8000/1000
NEC Silentwriter/260/290/990/SIntWII
NewGenSystemTrbo.PS/300/360/400
480/630/660/840/880
QMS KissLasergraphics 810/820
QMS PS 810/815/820
Wang LDP-8/LDP-8III/LDP-8IIID/
LDP-8-DSK-T


Part Number: 92295A
Gram Load: 275 grams
Yield @ 5%: 4000 pgs
Pages/Min.: 8ppm
Resolution: 300 dpi

Needle Nose Pliers
Small Flat Blade Screwdriver
#1 Phillips Screwdriver
Mag Roller Cleaner
Soft Lint-Free Cloth
Cotton Swabs
Anhydrous Isopropyl Alcohol
Vacuum or Compressed Air
Conductive Grease
Padding Powder

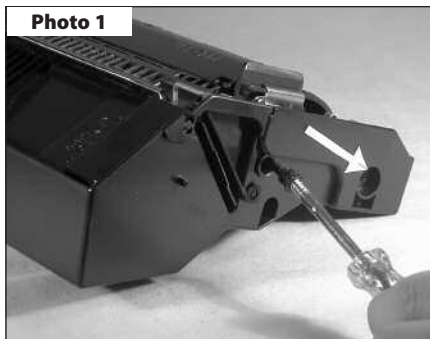


Step 1

Place the cartridge top side down on the table with one end facing you. Use a pin pulling tool to remove the two plastic locking pins.
(See Photo 1)

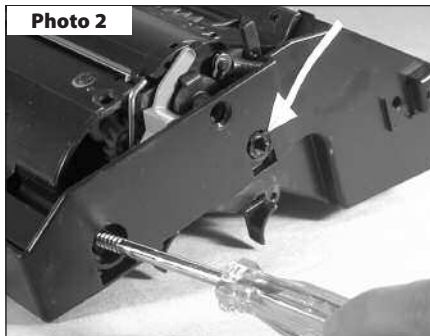

Step 2

Rotate the cartridge end for end and remove the other two plastic locking pins.
(See Photo 2)

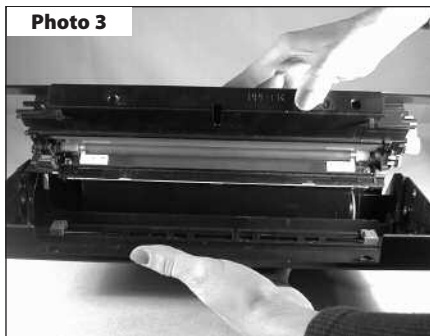

Step 3

Separate the cartridge shell from the waste hopper and set aside.
(See Photo 3)

Engine Fact Sheet

FUTURE GRAPHICS PRODUCT LISTING

PRODUCT	DESCRIPTION	ITEM #	PACK QTY.
Cartridge Bag	10x18, 2mil Heat-Sealable Black/Silver AntiStatic Foil	BAG10X18	100
Cartridge Box	14 7/8 1/2x8 13/16, tape-Top White Box/Blue Print	BLUEBAR15X9	25
Cartridge Box Label	Use box # BLUEBAR15X9, Die Cut Corrugated	SXINSERT	50
Cartridge Pin	Plastic, External Cartridge Plug, Use Two On Each End	SXPIN	100
Cartridge Tech Guide	Remanufacturing Instructions	SXTECH	1
Drum	AEG, Dark Green, "Classic"	SXAEG	5/100
Drum	Sinonar	SXSNR	5/50
Drum Protector Felt	Shutter Felt, Adhesive, 5 Inch	SHUTTERFELT5	100
Hopper	ready-to-Fill, With Seal	SXHOPRTF	
Hooper Cap	Fill Hole Plug .98" diameter, Red	SXFILLPLUG	100
Hooper Rail	4mm Metal Sure-Grip, Use 10 Per Cartridge	EXCLIP4MM	500
Mag Roller Bushing	Universal, set of Two	EEXBUSHING1	100
Mag Roller Contact	3-Part: Brass Cup, Copper Disc Contact, Steel Spring	SXCONTACT3	10
Mag Roller Contact		NXCONTACT1	100
Mag Roller Sleeve	New, Black Surface, Onyx	NXMAGONTYX	10
Recovery Blade		SXRBLADEW	16
Seal	Adhesive Goldseal	SXGOLDSEAL	50
Seal	PVC Separator Card 12 1/8 x 1 7/8, Green Litho Tab	SXSEALCARD	100
Seal Pull Tab	Black, Adhesive	EXPULLTAB	50
Toner	250 gm Bottle, Enhanced	SXTNRE250	10
Toner	275 gm Bottle, Enhanced	SXTNRE275	10
Toner	Bulk Bag, 22 lb Per-fil – Box of 1, enhanced, sold per Box	SXE10KG	10
Toner, MICR	250 gm Bottle	SXMICR250	10
Wand	with Nomex Felt, Unflocked	SXWAND	10
Wand Felt	Nomex, Adhesive With end Pieces	SXWANDfelt	10
Wiper Blade	Kuroki	SXWBLADEK	10/50/300

Future Graphics (FG) is a distributor of compatible replacement parts and products for imaging equipment.
None of FG's products are genuine OEM replacement parts and no affiliation or sponsorship is to be implied between FG and any OEM.